

Swing Range



Necta

Swing Range



Design and user interface

- Elegant and uncluttered design.
- Capacitive keyboard and wide graphical display.
- LED lighting of the white cell for a maximum visibility of the displayed products.



Maximum flexibility

- Swing is available as a Slave model too.
- Up to 7 trays which can be easily moved thanks to Vertical Flex (V-Flex) system.
- Space optimization inside the cell.
- With two optional Visioshop trays it is possible to create a special area for products with non standard packaging, such as salads and ready to go meals.
- Enhanced ETL trays.
- Wider delivery bin.



High energy efficiency

- C class according to EN 50597 scale.
- Perfect insulation of the cabinet.
- Cooling unit with R290 gas.
- High energy efficiency and dramatic decrease of pull down time.
- Swing can manage up to three temperatures inside the cell or can be set with a 100% Food or Ambient layouts.



Electronics

- Swing is compatible with Newis solutions.
- With Breasy it is possible to select and pay for your product in a completely touchless mode.
- With AmiClo it is possible to set up the machine remotely.



An elegant and uncluttered design



High visibility cell




Swing is available as a Slave model too



Features

Height	1830 mm
Width	900 mm
Depth	790 mm
Weight	300 kg ca.

Energy consumption labels

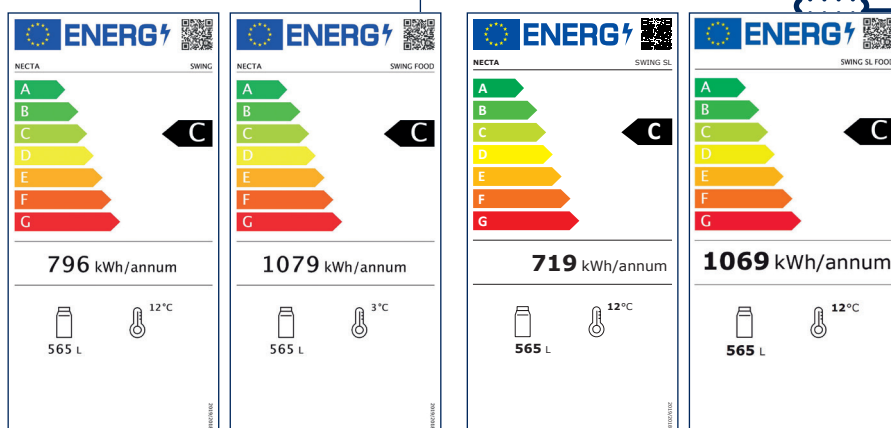

necta.evocagroup.com

Necta

EVOCA SPA
Via Roma 24, 24030 Valbrembo (BG) Italia
Tel. +39 035 606111 - Fax +39 035 606519

